SPECIFICATION:	(1P*28AWG +2C*24AWG+AL.Myla +Spiral)*8F		
ITEM		SPECIFICATION	
CONDUCTOR	AWG	28AWG	24AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7/0.127±0.008 mm	7/0.20±0.008 mm
INSULATION	MIN.AVG.THICK	0.20 mm	0.23 mm
	MATERIAL	HD-PE	SR-PVC LOW TOXIC
	O . D	0.85±0.05 mm	1.10± 0.05 mm
	N O.	1P	2C
Face Outside AL.MYLAR	COVERAGE	100%	
	OVERLAP	25% MIN	
DRAIN	AWG	/	
	MATERIAL	/	
	SIZE	/	
Spiral	MATERIAL	TINNED COPPER	
	SIZE	78±2/0.10±0.008 mm	
	NO.	8F	
JACKET	MIN.AVG.THICK	0.23 mm	
	MATERIAL	HALF MATT PVC	
	COLOR	UL813 BLACK LOW TOXIC	
	O . D	4.50*4.50*4.50*4.50*4.50*4.50*4.50*4.50 ± 0.10~1.00 mm	

ELECTRICAL CHARACTERISTICS

PHYSICAL PROPERTIES OF JACKET

CONSTRUCTION DWG

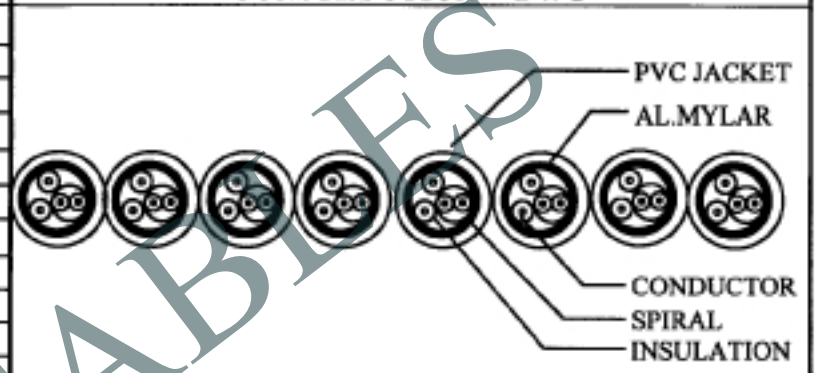

COLOR CODE:

1P*28AWG: GREEN * WHITE

2C*24AWG: 1. RED 2. BLACK

MARKING

REMARK

APPROVED		CUSTOMER	
CHECKED	l'	REV	A
DRAWING	*LMX*	DATE	2006/11/20

WEST COAST CABLES